

Overview of elements 2026

vistaline™

Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information


Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.

For this reason, your order must contain the following information:

- Range name and front number
- Handle number
- Drill pattern number
- Carcase colour number
- Plinth height and colour
  (if not specified, the standard plinth height of 150 mm will be supplied)
- Worktop design / décor
- Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- Glass design and / or colour
- Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe.
The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black.
If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.

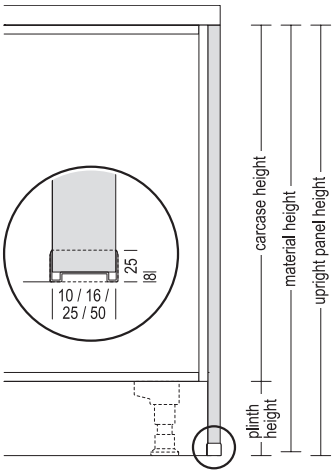

The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

carcase height
+ plinth height
- 8 mm interior chamfering of the floor profile
= material height


The new 20 mm plinth height

For the 2026 collection, Vistaline has added the 20 mm plinth height. For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Base units


Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Base units




Base unit
1 continuous door,
1 shelf

UD 20/30/40/45/50/60 cm




Base unit
1 pinned door,
1 shelf

U 20/30/40/45/50/60 cm




Base unit
2 continuous doors,
1 shelf

UD 80/90/100/120 cm




Base unit
2 pinned doors,
1 shelf

U 80/90/100/120 cm




Base unit
1 drawer,
1 door,
1 shelf

US 30/40/45/50/60 cm




Base unit
2 drawers,
2 doors,
1 shelf

US 80/90/100/120 cm




Base unit
1 drawer,
2 doors,
1 shelf

USG 80/90/100/120 cm




Pull-out unit
2 pull-outs,
1 internal drawer

UI2DA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit
1 drawer,
2 pull-outs

UA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit
2 drawers,
1 pull-out


UD2SA 50/60/80/90/100/120 cm



Drawer unit
3 drawers,
1 pull-out

U3SA 30/40/45/50/60/80/90/100/120 cm

Base units



Pull-out unit
1 pull-out,
1 continuous front,
2 metal boxes with
non-slip mats


UAMD 20/30 cm



Open shelf base unit
2 fixed shelves,
side depth: 582 mm


UR 15/20/30/40/45/50/60 cm

Corner base units




Corner base unit
2 continuous doors,
opening angle: 165°,
1 shelf

UDTE 80/90 cm




Corner base unit
2 pinned doors,
opening angle: 165°,
1 shelf

UTE 80/90 cm




Corner base unit as carousel unit
2 continuous fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf

UEDK 80/90 cm




Corner base unit as carousel unit
2 pinned fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf

UEK 80/90 cm



Chamfered corner base unit
1 continuous door,
1 shelf

UED 80/90 cm



Chamfered corner base unit
1 pinned door,
1 shelf


UE 80/90 cm

Half corner base units




UED90-40
UED90-45
UED100-50
UED100-60

Corner base unit
1 continuous door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




UE90-40
UE90-45
UE100-50
UE100-60

Corner base unit
1 drawer,
1 door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




UEDSA90-45
UEDSA100-50
UEDSA100-60

Corner unit with swivel pull-out
1 continuous door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




UESA90-45
UESA100-50
UESA100-60

Corner unit with swivel pull-out
1 drawer,
1 door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm



UESAV90-45
UESAV100-50
UESAV100-60

Corner unit with swivel pull-out
1 pinned door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




MP-GS

Surcharge for recessed fillers
on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Base units

Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 20, 70, 100, 150 or 200 mm


Angle fillers



UPE
UPE-V

Angle filler
Continuous front material, 70 x 70 mm, planning dimensions: 650 x 650 mm

as above, however **variable** from 50 to 170 mm, planning dimensions: 630 - 750 mm
1st dimension = left /
2nd dimension = right



MP-GS


Surcharge for recessed fillers
on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Fillers / Panelling




UPK 10/20 cm

Filler
Carcase material, 720 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm




UPD 20 cm

Front filler
Continuous front material, width: 200 mm



RK-72




RKS-72

Base unit back panel
16 mm thick, 720 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1, Vario clip fastening, in case of reproduction finishes vertical wood grain

as above, however, continuous height, including floor profile:
70 mm plinth height: 810 mm
100 mm plinth height: 840 mm
150 mm plinth height: 890 mm
200 mm plinth height: 940 mm


Available floor profile colours:
010 Black
014 Stainless steel appearance



RFD-72
30/40/45/50/60/80/90 cm


Base unit back panel
1 continuous front design, 720 mm high, Vario clip fastening, without drill hole

Cooker housing




HU 60 cm

Cooker housing
1 fixed panel, side sections: 202 mm deep, aperture dimension: 591 mm



HUB 60 cm

Cooker housing
1 fixed panel, aperture dimension: 598 mm



HUS 60 cm

Cooker housing
1 plastic drawer, 16 l capacity, interior dimensions: 485 x 480 x 68 mm, aperture dimension: 598 mm

Hot plate units



KD60 60 cm

Hot plate unit
1 internal panel, 1 construction shelf for heat insulation, 1 door, 1 shelf



K60 60 cm

Hot plate unit
1 fixed panel, 1 construction shelf for heat insulation, 1 door, 1 shelf




KS60 60 cm

Hot plate unit
1 drawer, 1 spacer shelf for hot plate, 1 door, 1 shelf



KS2A
60/80/90/100/120 cm


Hot plate unit
1 drawer, 1 spacer shelf for hot plate, 2 pull-outs



KD2A
60/80/90/100/120 cm


Hot plate unit
1 internal panel, 1 construction shelf for heat insulation, 2 pull-outs

Sink units




SPUD 40/45/50/60 cm

Sink base unit
1 internal panel, 1 continuous door




SPU 40/45/50/60 cm

Sink base unit
1 fixed panel, 1 door




SPUD 80/90/100/120 cm

Sink base unit
2 internal panels, 2 continuous doors




SPU 80/90/100/120 cm

Sink base unit
2 fixed panels, 2 doors




SPUAD
40/45/50/60 cm

Sink base unit
1 internal panel, 1 continuous front with centred handle, without pull-out rails and drill holes




SPUA 40/45/50/60 cm

Sink base unit
1 fixed panel, 1 front with centred handle, without pull-out rails and drill holes




SPUDA-AK
45/50/60 cm




Sink base unit Separato-K
1 internal panel, 1 pull-out, 500 mm deep, with **waste separation system Separato-K** with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)

Doors for integrated appliances




GSB 45/60 cm

Door
for integrated dishwashers, without handle



GSBD*-I 45/60 cm

Continuous door
for fully integrated dishwashers, built-under fridge and freezer units with pull-outs




GSB*-I 45/60 cm

Pinned door
for fully integrated dishwashers, built-under fridge and freezer units with pull-outs

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Base units




XL Base unit
1 continuous door,
2 shelves

UD*-X 20/30/40/45/50/60 cm




XL Base unit
1 pinned door,
2 shelves

U*-X 20/30/40/45/50/60 cm




XL Base unit
2 continuous doors,
2 shelves

UD*-X 80/90/100/120 cm




XL Base unit
2 pinned doors,
2 shelves

U*-X 80/90/100/120 cm




XL Base unit
1 drawer,
1 door,
1 shelf

US*-X 30/40/45/50/60 cm




XL Base unit
2 drawers,
2 doors,
1 shelf

US*-X 80/90/100/120 cm




XL Base unit
1 drawer,
2 doors,
1 shelf

USG*-X 80/90/100/120 cm




Pull-out unit
2 pull-outs,
1 internal drawer

UI2DA*-X 30/40/45/50/60/80/90/100/120




XL Pull-out unit
1 drawer,
2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm



Pull-out unit
2 drawers,
1 pull-out


UD2SA*-X 80/90/100/120 cm cm



XL Drawer unit
3 drawers,
1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm

XL Base units



XL Pull-out unit
1 pull-out,
1 continuous front,
2 metal boxes with
non-slip mats


UAMD*-X 20/30 cm



XL Open shelf base unit
2 fixed shelves,
side depth: 582 mm


UR*-X 15/20/30/40/45/50/60 cm

XL Corner base units




XL Corner base unit
2 continuous doors,
opening angle: 165°,
2 shelves

UDTE*-X 80/90 cm




XL Corner base unit
2 pinned doors,
opening angle: 165°,
2 shelves

UTE*-X 80/90 cm




XL Corner base unit
as carousel unit
2 continuous fronts,
Unit height: 822 mm,
1 revolving carousel with
2 wooden shelves and
metal railing,
rotates 360°
height adjustable top shelf

UEDK*-X 80/90 cm




XL Corner base unit
as carousel unit
2 pinned fronts,
Unit height: 822 mm,
1 revolving carousel with
2 wooden shelves and
metal railing,
rotates 360°
height adjustable top shelf

UEK*-X 80/90 cm



XL Chamfered corner base unit
1 continuous door,
2 shelves

UED*-X 80/90 cm



XL Chamfered corner base unit
1 pinned door,
2 shelves


UE*-X 80/90 cm

XL Half-corner units




XL Corner base unit
1 continuous door,
2 shelves,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UED90-40-X
UED90-45-X
UED100-50-X
UED100-60-X




XL Corner base unit
1 drawer,
1 door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UE90-40-X
UE90-45-X
UE100-50-X
UE100-60-X




XL Corner unit with
swivel pull-out
1 continuous door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UEDSA90-45-X
UEDSA100-50-X
UEDSA100-60-X




XL Corner unit with
swivel pull-out
1 drawer,
1 door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UESA90-45-X
UESA100-50-X
UESA100-60-X



XL Corner unit with
swivel pull-out
1 pinned door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UESAV90-45-X
UESAV100-50-X
UESAV100-60-X




Surcharge for
recessed fillers
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

MP-GS

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 20, 70, 100, 150 or 200 mm


XL Angle fillers



UPE-X
UPE-V-X

XL Angle filler
Continuous front material, 70 x 70 mm, Planning dimensions: 650 x 650 mm


as above, however **variable from** 50 to 170 mm, Planning dimensions: 630 - 750 mm
1st dimension = left
2nd dimension = right



MP-GS


Surcharge for recessed fillers
on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

XL Fillers / Panelling




UPK*-X 10/20 cm

XL Filler
Carcase material, 792 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm




UPD*-X 20 cm

XL Front filler
Continuous front material, width: 200 mm



RK-79




RKS-79

XL Base unit back panel
16 mm thick, 792 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1, Vario clip fastening, in case of reproduction finishes vertical wood grain

as above, however, continuous height, including floor profile:
70 mm plinth height: 882 mm
100 mm plinth height: 912 mm
150 mm plinth height: 962 mm
200 mm plinth height: 1012 mm


Available floor profile colours:
010 Black
014 Stainless steel appearance



RFD*-79
30/40/45/50/60 cm


XL Base unit back panel
1 continuous front, 789 mm high, Vario clip fastening, without drill holes

XL Cooker housings



HUB-X 60 cm

XL Cooker housing
1 fixed panel, aperture dimension: 595 mm



HUS*-X 60 cm

XL Cooker housing
1 plastic drawer, 16 l capacity, interior dimensions: 485 x 480 x 68 mm aperture dimension: 595 mm

XL Hot plate units



KD60-X 60 cm

XL Hot plate unit
1 internal panel, 1 construction shelf for heat insulation, 1 door, 2 shelves



K60-X 60 cm

XL Hot plate unit
1 fixed panel, 1 construction shelf for heat insulation, 1 door, 1 shelf




KS60-X 60 cm

XL Hot plate unit
1 drawer, 1 spacer shelf for hot plate, 1 door, 1 shelf



KS2A*-X
60/80/90/100/120 cm


XL Hot plate unit
1 drawer, 1 spacer shelf for hot plate, 2 pull-outs



KD2A*-X
60/80/90/100/120 cm


XL Hot plate unit
1 internal panel, 1 construction shelf for heat insulation, 2 pull-outs

XL-Doors for integrated appliances



GSBD*-I-X 45/60 cm


Continuous XL door
for fully integrated dishwashers, built-under fridge and freezer units with pull-outs, includes spacer strip



GSB*-I-X 45/60 cm

Pinned XL door
for fully integrated dishwashers, built-under fridge and freezer units with pull-outs, includes spacer strip

XL Sink base units




SPUD*-X 40/45/50/60 cm

XL Sink base unit
1 internal panel, 1 continuous door




SPU*-X 40/45/50/60 cm

XL Sink base unit
1 fixed panel, 1 door



SPUD*-X 80/90/100/120 cm

XL Sink base unit
2 internal panels, 2 continuous doors



SPU*-X 80/90/100/120 cm

XL Sink base unit
2 fixed panels, 2 doors



SPUAD*-X
40/45/50/60 cm

XL Sink base unit
1 internal panel, 1 continuous front with centred handle, without pull-out rails and drill holes




SPUA*-X 40/45/50/60 cm

XL Sink base unit
1 fixed panel, 1 front with centred handle, without pull-out rails and drill holes




SPUDA-AK*-X
45/50/60 cm



XL Sink unit Separato-K
1 internal panel, 1 pull-out, 500 mm deep, with **waste separation system Separato-K** with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)


Worktops | Niche cladding

Worktops



APN
60/70/80/90/100/
110/120 cm


Worktop APN
with N-edge
rounded front edge,
sides sealed with straight décor edge.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2
(Xtra décors): 4000 mm
Please quote the décor number in your order.



APD
60/70/80/90/100/
110/117 cm


Worktop APD
with décor edge
front and side edges coated with straight décor edging material, 1.5 mm thick.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2
(Xtra décors): 4000 mm
Please quote the décor and edge colour number in your order.

Worktop processing



AP-R

Surcharge for exterior and interior roundings deviating from the standard radii



APN-A
APN-AS
APD-A

Surcharge for chamfered cuts
on worktops and tables, including edging




AP-NF

Tongue and groove joint
for worktop corners or extensions,
incl. screw fittings,
tongues and water resistant glue

o. Abb.

AP-AUS

Cut-outs for built in hobs, sinks or ventilation grills



AP-IEK

Surcharge for inner corners in square design
on worktops and tables with décor edge

Niche cladding



NV 54
NV 70

Niche cladding
coated on both faces,
16 mm thick,
horizontal structure
with edge on all sides,
width: 250 - 2580 mm
heights:
NV54 for niches beneath wall units
NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above,
however with deviating dimensions acc. to sketch
max. 2580 mm wide,
2030 mm high,
1st dimension in direction of grain
coated edge all round.
Minimum price: 0.5 m²,
minimum dimensions:
250 x 200 mm,
invoiced per m².

Accessories for niche cladding



NPUK 500


Plastic cover profile in translucent appearance
for niche or back panel cladding,
16 mm thick,
self-adhesive,
5000 mm long



WAPN
200/400/500 cm

Upstands for continuous planning with niche cladding
2-piece plastic profile with sealing lip,
incl. vertical sealing profile
dimensions: 25 mm high,
25 mm deep,
delivered as strand material.


Available in:
014 Stainless steel appearance, 010 Black



WAPN-Z

WAPN accessory bag
matches the plastic upstands WAPN
consisting of:
4 x interior corner 90° /
2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps for WAPN
2 x set of end caps for niche cladding


Available in:
014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Niche profile on bottom Aluminium profile, 2-piece with sealing profile
for niche and back panel cladding or as upstand,
dimensions:
17 mm high, 20 mm deep

Available in:
014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance
for niche cladding incl. 1 set of end caps (left / right),
dimensions:
16 mm high, 16 mm deep



NKP-Z

NKP accessory bag
matches upstand NKPU

Available in:
014 Stainless steel appearance, 010 Black




NKP-EK

1 set of end caps
matching aluminium profile for niche cladding NKPO

Upright panels | Top shelves | Wall shelf units


Upright panels for base units



UWA 10/16/25/50 mm

Upright at end of run
incl. floor profile in
014 Stainless steel
appearance or
010 Black,
depth: 583 mm

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm




UWR 10/16/25/50 mm

Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor profile in
014 Stainless steel
appearance or
010 Black

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm


XL Upright panels for base units



UWA*-X 10/16/25/50 mm

XL Upright at end of run
incl. floor seal in
014 Stainless steel
appearance or
010 Black,
depth: 583 mm

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm




UWR*-X 10/16/25/50 mm

XL Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor seal in
014 Stainless steel
appearance or
010 Black

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm

Wall shelf units



WB25 30/40/45/50/55/
60/65/70/80/90/
100/110/120 cm

Plug-in wall shelf,
25 mm thick
Carcase material,
polymer edging all around,
255 mm deep,
incl. metal plug fitting




VB16 100 cm

Wall shelf unit with shelf holders, 16 mm thick
255 mm deep,
polymer edging all round,
available in widths from 250 mm to 1000 mm,
includes 2 shelf holders VBH5

VB16 258 cm

Wall shelf unit with shelf holders as above,
however available in widths from 1001 mm to 2580 mm,
includes 4 shelf holders VBH5

Available shelf holder colours:
010 Black
014 Stainless steel appearance




VB25 100 cm

Wall shelf unit with shelf holders, 25 mm thick
255 mm deep,
polymer edging all round,
available in widths from 250 mm to 1000 mm,
includes 2 shelf holders VBH5

VB25 258 cm

Wall shelf unit with shelf holders as above,
however available in widths from 1001 mm to 2580 mm,
includes 4 shelf holders VBH5

Available shelf holder colours:
010 Black
014 Stainless steel appearance



VB50 100 cm


Wall shelf unit with shelf holders, 50 mm thick
255 mm deep,
polymer edging all round,
available in widths from 250 mm to 1000 mm,
includes 2 shelf holders VBH5

VB50 258 cm

Wall shelf unit with shelf holders as above,
however available in widths from 1001 mm to 2580 mm,
includes 4 shelf holders VBH5


Available shelf holder colours:
010 Black
014 Stainless steel appearance

Upright panels for wall units




WW 10/16/25/50 mm **-36**

Upright at end of run / intermediate upright for wall units,
height 360 mm
depth: 372 mm,
height: 360 mm




WW 10/16/25/50 mm **-58**

Upright at end of run / intermediate upright for wall units,
height 576 mm
depth: 372 mm,
height: 576 mm




WW 10/16/25/50 mm **-1**

Upright at end of run / intermediate upright for wall units,
height 1
depth: 372 mm,
height: 720 mm



WW 10/16/25/50 mm **-2**


Upright at end of run / intermediate upright for wall units,
height 2
depth: 372 mm,
height: 792 mm



WW 10/16/25/50 mm **-3**


Upright at end of run / intermediate upright for wall units,
height 3
depth: 372 mm,
height: 864 mm

Top shelves




ADB10 38/59/117 cm

Top shelf,
10 mm thick,
for side- or highboard
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm




ADB16 38/59/117 cm

Top shelf,
16 mm thick,
for side- or highboard
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm



ADB25 38/59/117 cm

Top shelf,
25 mm thick,
for side- or highboard
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm




ADB50 38/59/117 cm

Top shelf,
50 mm thick,
for side- or highboard
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm

Highboards – 1532 / 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm
Carcase height: 1512 mm
Plinth height: 20, 70, 100, 150 or 200 mm


Highboards



Highboard
2 doors,
1 fixed shelf,
3 shelves

H 30/40/50/60 cm


Housing for ovens



Oven housing
aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 pinned door,
1 shelf

GOS


Integrated appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs

G88A


Integrated appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 drawer

G123S


Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer
aperture height: 1450 mm
1 internal panel,
2 appliance doors

G145

Fillers



Filler
Carcase material,
1512 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20 20 cm

XL Highboards – 1604 / 1654 / 1684 / 1734 / 1784 mm high

Carcase depth: 561 mm
Carcase height: 1584 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Highboards



XL Highboard
2 doors,
1 fixed shelf,
3 shelves

H*-X 30/40/50/60 cm


XL Housing for ovens



XL Oven housing
aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 door,
2 shelves

GDOS-X


XL Integrated appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs

G88A-X


XL Integrated appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 pull-out

G123A-X


XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer
aperture height: 1450 mm
2 appliance doors

G145-X

XL Fillers



XL Filler
Carcase material,
1584 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-X 20 cm

Tall units, height 1 – 2036 / 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Tall units




Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-1 30/40/50/60 cm




Pantry unit
2 doors,
1 fixed shelf,
4 shelves

HDV*-1 30/40/50/60 cm



Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1 30/40 cm




Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1 30/40 cm



Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards


HB*-1 40/50/60 cm



Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-1 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances




Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GO-1




Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-1




Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-1




Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-1




Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-1



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
1 door,
1 shelf


GLO-1



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-1

Appliance housings with aperture height up to 880 mm




Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-1



Appliance housing for integrated fridge
aperture height: 880 mm
1 flap,
1 appliance door,
1 door,
1 shelf


GD88-1



Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-1

Appliance housings with aperture height up to 1230 mm




Appliance housing for integrated fridge
aperture height: 1230 mm
1 appliance door,
1 door,
1 shelf

G123-1



Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 internal panel,
1 appliance door,
1 pull-out

G123A-1




Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-1

Tall units, height 1 – 2036 / 2086 / 2116 / 2166 / 2216 mm high


Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 appliance door for freezer compartment,
1 appliance door for fridge section,
1 pull-out


G145A-1



Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors

G145-1


Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm
2 appliance doors


GD194-1

Fillers / Cladding



Filler
Carcase material,
2016 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-1 20 cm



Front filler
Continuous front material,
width: 200 mm


HPD20-1 20 cm



Tall units in XL height, height 1 XL – 2108 / 2158 / 2188 / 2238 / 2288 mm high


Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Tall units




XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-1X 30/40/50/60 cm




XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

HDV*-1X 30/40/50/60 cm




XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1X 30/40 cm




XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1X 30/40 cm



XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-1X 40/50/60 cm



XL Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-1X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances




XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
3 shelves

GO-1X



XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-1X




XL Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-1X



XL Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-1X




XL Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-1X



XL Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
1 door,
1 shelf


GLO-1X



XL Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-1X

XL Appliance housings with aperture height up to 880 mm




XL Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-1X



XL Appliance housing for integrated fridge
aperture height: 880 mm
1 flap,
1 appliance door,
1 door,
2 shelves


GD88-1X



XL Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-1X

XL Appliance housings with aperture height up to 1230 mm




XL Appliance housing for integrated fridge
aperture height: 1230 mm
1 appliance door,
1 door,
1 shelf

G123-1X



XL Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 internal panel,
1 appliance door,
1 pull-out

G123A-1X




XL Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-1X

Tall units in XL height, height 1 XL – 2108 / 2158 / 2188 / 2238 / 2288 mm high


Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors


G145-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 appliance door for freezer compartment,
1 appliance door for fridge section,
1 pull-out

G145A-1X


XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm
2 appliance doors


GD194-1X

XL Fillers / Cladding



XL Filler
Carcase material,
2088 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-1X 20 cm



XL Front filler
Continuous front material,
width: 200 mm


HPD20-1X 20 cm



Tall units, height 2 – 2108 / 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Tall units




Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-2 30/40/50/60 cm




Pantry unit
2 doors,
1 fixed shelf,
4 shelves

HDV*-2 30/40/50/60 cm




Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-2 30/40 cm




Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2 30/40 cm



Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards


HB*-2 40/50/60 cm



Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-2 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances




Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GO-2




Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-2




Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-2




Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-2




Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-2



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
1 shelf


GLO-2



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-2

Appliance housings with aperture height up to 880 mm




Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-2



Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
1 shelf


GD88-2



Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-2

Appliance housings with aperture height up to 1230 mm




Appliance housing for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-2



Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

G123A-2




Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-2

Tall units, height 2 – 2108 / 2158 / 2188 / 2238 / 2288 mm high


Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm
1 door,
1 internal panel,
2 appliance doors


GD145-2



Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors,

G145-2


Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm
1 flap,
2 appliance doors


GD178-2

Fillers / Cladding



Filler
Carcase material,
2088 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-2 20 cm



Front filler
Continuous front material,
width: 200 mm


HPD20-2 20 cm



Tall units in XL height, height 2 XL – 2180 / 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Tall units




XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-2X 30/40/50/60 cm




XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

HDV*-2X 30/40/50/60 cm



XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-2X 30/40 cm




XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-2X 40/50/60 cm



XL Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-2X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances




XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
3 shelves

GO-2X




XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-2X




XL Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-2X




XL Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-2X




XL Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 fixed compensation panel,
2 pull-outs

GMO2A-2X



XL Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
1 shelf


GLO-2X



XL Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-2X

XL Appliance housings with aperture height up to 880 mm




XL Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-2X



XL Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves


GD88-2X



XL Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-2X

XL Appliance housings with aperture height up to 1230 mm




XL Appliance housing for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-2X



XL Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

G123A-2X




XL Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-2X

Tall units in XL height, height 2 XL – 2180 / 2230 / 2260 / 2310 / 2360 mm high


Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm
1 door,
1 internal panel,
2 appliance doors


GD145-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors

G145-2X


XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1780 mm
1 flap,
2 appliance doors


GD178-2X

XL Fillers / Cladding



XL Filler
Carcase material,
2160 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-2X 20 cm



XL Front filler
Continuous front material,
width: 200 mm

HPD20-2X 20 cm



Tall units, height 3 – 2180 / 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Tall units




Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-3 30/40/50/60 cm




Pantry unit
2 doors,
1 fixed shelf,
4 shelves

HDV*-3 30/40/50/60 cm




Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-3 30/40 cm




Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-3 30/40 cm



Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-3 40/50/60 cm



Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-3 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances




Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
3 shelves

GO-3



Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
3 shelves

GOS-3




Oven housing
aperture height: 590 mm
1 door,
2 shelves,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-3




Appliance housing
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GMO-3




Appliance housing
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-3



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
2 shelves


GLO-3



Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 shelf,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-3

Appliance housings with aperture height up to 880 mm




Appliance housing
for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-3



Appliance housing
for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves


GD88-3



Appliance housing
for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-3

Appliance housings with aperture height up to 1230 mm




Appliance housing
for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-3



Appliance housing
for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

G123A-3




Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
2 shelves,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-3

Tall units, height 3 – 2180 / 2230 / 2260 / 2310 / 2360 mm high


Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 20, 70, 100, 150 or 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors


GD145-3



Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors,

G145-3


Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm
1 flap,
2 appliance doors


GD178-3

Fillers / Cladding



Filler
Carcase material,
2160 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-3 20 cm



Front filler
Continuous front material,
width: 200 mm

HPD20-3 20 cm



Tall units in XL height, height 3 XL – 2252 / 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm
Carcase height: 2232 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Tall units




XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-3X 30/40/50/60 cm




XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

HDV*-3X 30/40/50/60 cm



XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable,
1 fixed shelf

HA*-3X 30/40 cm




XL Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable,
1 fixed shelf

HDA*-3X 30/40 cm



XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-3X 40/50/60 cm



XL Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-3X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances




XL Oven housing aperture height: 590 mm
2 doors,
1 fixed compensation panel,
4 shelves

GO-3X



XL Oven housing aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
3 shelves

GOS-3X




XL Oven housing aperture height: 590 mm
1 door,
2 shelves,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GMO-3X




XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-3X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
2 shelves


GLO-3X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm
1 door,
1 shelf,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-3X

XL Appliance housings with aperture height up to 880 mm




XL Appliance housing for integrated fridge aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm
2 doors,
1 appliance door,
3 shelves


GD88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-3X

XL Appliance housings with aperture height up to 1230 mm




XL Appliance housing for integrated fridge aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-3X



XL Appliance housing for integrated fridge aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door,
1 pull-out

G123A-3X




XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm
1 door,
2 shelves,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-3X

Tall units in XL height, height 3 XL – 2252 / 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm
Carcase height: 2232 mm
Plinth height: 20, 70, 100, 150 or 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors


GD145-3X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors,

G145-3X


XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm
2 appliance doors


GD194-3X

XL Fillers / Cladding



XL Filler
Carcase material,
2232 mm high,
U-shaped seal for connection to wall,
width: 230 mm

HPK20-3X 20 cm



XL Front filler
Continuous front material,
width: 200 mm


HPD20-3X 20 cm



Wall units 360 mm high


Carcase depth: 350 mm
Carcase height: 360 mm

Wall units 360 mm high



Wall unit
1 door

W*-36
45/50/60 cm



Wall unit with flap door
1 flap,
opening angle 107°

WK*-36
45/50/60/80/90/100/
120 cm



Wall unit with framed glass flap door
1 framed glass flap door,
clear glass No. 01,
opening angle 107°,
glass variants against surcharge: MP-GW

WKG*-36
50/60/80/90/100/
120 cm

No image

Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW

Wall units 360 mm high



Wall unit with glass doors Square
1 aluminium framed flap,
opening angle 107°,
handleless version with wall unit bottom shelf with attached profile strip in stainless steel appearance

Available in:
No. 321 Aluminium framed front in stainless steel appearance with
02 Matt glass
No. 308 Aluminium framed front in stainless steel appearance with
035 Grey glass
No. 329 Aluminium framed front in Black with
39 Black glass


WKSQ*-36
50/60/80/90/100/
120 cm



Open shelf wall unit
side depth: 371 mm


WR*-36
30/40/45/50/60/80/90/
100/120 cm

Fillers



Filler
Carcase material,
360 mm high,
U-shaped seal for connection to wall,
width: 100 mm / 200 mm

WPK*-36
10/20 cm



Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm


WPD20-36
20 cm



Wall units 576 mm high


Carcase depth: 350 mm
Carcase height: 576 mm

Wall units 576 mm high




Wall unit
1 door,
1 shelf

W*-58
20/30/35/40/45/50/60 cm




Wall unit
2 doors,
1 shelf

W2T-58 60 cm
W*-58 80/90/100/120 cm



Wall unit
2 doors hinged parallel,
1 shelf


W2TP*-58
80/90/100 cm



Wall unit
1 folding door with slide mechanism,
1 shelf

WFT60-58
60 cm

Wall units 576 mm high




Wall unit, folding/lifting door
1 folding/lifting door,
2 original fronts,
1 shelf

WFL*-58
50/60/80/90/100/120 cm



Wall unit for microwave
1 aperture depending on appliance height,
1 flap as niche compensation


WM*-58
50/60 cm



Corner wall unit, diagonal
1 door: 394 mm wide,
opening angle 90°,
1 shelf,
Planning dimensions:
650 x 650 mm

WED65-58


Wall units 576 mm high



Corner wall unit
1 door,
1 angle filler,
1 shelf
Carcase widths:
600, 782, 882 mm

WE60-20-58
WE80-35-58
WE90-45-58

Planning dimensions (variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm



Open shelf wall unit
1 fixed shelf,
side depth: 371 mm


WR*-58
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
3 fixed shelves,
side depth: 371 mm


WRF15-58
15 cm

Fillers



Filler
Carcase material,
576 mm high,
U-shaped seal for connection to wall,
width: 100 mm / 200 mm

WPK*-58
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-58
20 cm

Wall units, height 1 – 720 mm high

Carcase depth: 350 mm
Carcase height: 720 mm

Wall units 720 mm high



Wall unit
1 door,
2 shelves

W*-1
20/25/30/35/40/45/50/55/60 cm



Wall unit
2 doors,
2 shelves

W2T-1 60 cm
W*-1 80/90/100 cm




Wall unit
2 doors hinged parallel,
2 shelves

W2TP*-1
80/90/100 cm




Wall unit
1 folding door with slide mechanism,
2 shelves

WFT60-1
60 cm



Wall unit,
framed glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WG*-1
45/50/60 cm



Wall unit,
framed glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WG*-1
90/100 cm



Wall unit,
segmented glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-1
45/50/60 cm

Wall units 720 mm high




Wall unit,
segmented glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-1
90/100 cm

No image


Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW



Wall unit, folding/lifting door
1 folding/lifting door,
2 original fronts,
2 shelves

WFL*-1
50/60/80/90/100/120 cm




Wall unit, folding/lifting door
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WFLG*-1
50/60/80/90/100/120 cm




Wall unit for microwave
1 aperture depending on appliance height,
1 flap as niche compensation

WM*-1
50/60 cm



Corner wall unit, diagonal
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm


WED65-1



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first door to be opened

WE*-1
60/65/80/90 cm

Wall units 720 mm high



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm


Planning dimensions (variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

WE60-20-1
WE80-35-1
WE90-45-1



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm


WR*-1
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
4 fixed shelves,
side depth: 371 mm


WRF15-1
15 cm

Fillers



Filler
Carcase material,
720 mm high,
U-shaped seal for connection to wall ,
width: 100 mm / 200 mm

WPK*-1
10/20 cm



Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-1
20 cm

Wall units, height 2 – 792 mm high


Carcase depth: 350 mm
Carcase height: 792 mm

Wall units 792 mm high



Wall unit
1 door,
2 shelves

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit
2 doors,
2 shelves

W2T*-2 60 cm
W*-2 80/90/100 cm



Wall unit
2 doors hinged parallel,
2 shelves

W2TP*-2
80/90/100 cm



Wall unit
1 folding door with slide mechanism,
2 shelves

WFT60-2
60 cm




Wall unit,
framed glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WG*-2
45/50/60 cm



Wall unit,
framed glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW


WG*-2
90/100 cm



Wall unit,
segmented glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-2
45/50/60 cm

Wall units 792 mm high




Wall unit,
segmented glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-2
90/100 cm

No image


Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW



Wall unit,
folding/lifting door
1 folding/lifting door,
2 original fronts,
2 shelves

WFL*-2
50/60/80/90/100/120 cm




Wall unit,
folding/lifting door
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WFLG*-2
50/60/80/90/100/120 cm




Wall unit for microwave
1 aperture depending on appliance height,
1 flap as niche compensation

WM*-2
50/60 cm



Corner wall unit,
diagonal
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm


WED65-2



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first door to be opened

WE*-2
60/65/80/90 cm

Wall units 792 mm high



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

Planning dimensions (variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

WE60-20-2
WE80-35-2
WE90-45-2



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm


WR*-2
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
4 fixed shelves,
side depth: 371 mm


WRF15-2
15 cm

Fillers



Filler
Carcase material,
792 mm high,
U-shaped seal for connection to wall,
width: 100 mm / 200 mm

WPK*-2
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-2
20 cm

Wall units, height 3 – 864 mm high


Carcase depth: 350 mm
Carcase height: 864 mm

Wall units 864 mm high




Wall unit
1 door,
2 shelves

W*-3 20/25/30/35/40/45/50/55/60 cm




Wall unit
2 doors,
2 shelves

W2T*-3 60 cm
W*-3 80/90/100 cm



Wall unit
2 doors hinged parallel,
2 shelves

W2TP*-3
80/90/100 cm



Wall unit
1 folding door with slide mechanism,
2 shelves

WFT60-3
60 cm




Wall unit,
framed glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WG*-3
45/50/60 cm




Wall unit,
framed glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WG*-3
90/100 cm



Wall unit,
segmented glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-3
45/50/60 cm



Wall unit,
segmented glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: MP-GW

WGLS*-3
90/100 cm

No image

MP-GW


Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

Wall units 864 mm high




Wall unit for microwave
1 aperture depending on appliance height,
1 door as niche compensation,
1 shelf

WM*-3
50/60 cm




Corner wall unit, diagonal
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

WED65-3



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first door to be opened


WE*-3
60/65/80/90 cm



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

Planning dimensions (variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

WE60-20-3
WE80-35-3
WE90-45-3



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm


WR*-3
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
5 fixed shelves,
side depth: 371 mm,
width: 150 mm


WRF15-3
15 cm

Fillers



Filler
Carcase material,
864 mm high,
U-shaped seal for connection to wall,
width: 100 mm / 200 mm

WPK*-3
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-3
20 cm

Wall units for cooker hoods
Bridging shelf


Wall units for cooker hoods



Wall unit for slimline cooker hoods
internal panel,
metal grids,
80 mm deep,
the number of metal grids depends on the built-in dimensions of the cooker hood

WDAF60-58	60 cm	height: 576 mm
WDAF60-1	60 cm	height: 720 mm
WDAF60-2	60 cm	height: 792 mm
WDAF60-3	60 cm	height: 864 mm

Bridging shelf



Bridging shelf in carcase material
laminated on both faces in the same colour,
16 mm thick,
350 mm deep,
with edging material on 3 sides,
for fitting between wall units or as a window bridging.
Price per running 100 mm, invoiced per started 100 mm.
Width: 250 - 2580 mm

WZB260

WZB60

Bridging shelf in carcase material as above,
however 600 mm wide


Accessories

Plastic cutlery trays and pull-out organisers




BE* Y
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Youno
Slate grey, height: 49 mm,
fits drawer depth of 500 mm,
side depth: 561 mm

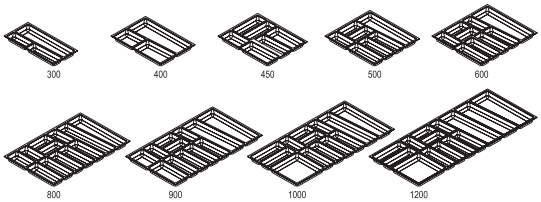

BE* -46 Y
45/50/60/80/90/
100/120 cm


as above, however for drawer depth 400 mm,
side depth: 461 mm

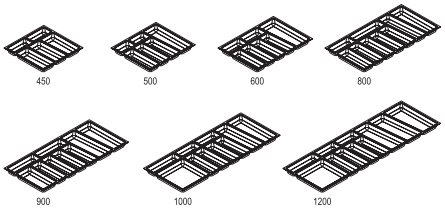




BE* D
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Depot
Non-slip soft touch surface,
slate grey, height: 49 mm,
fits drawer depth 500 mm,
side depth: 561 mm

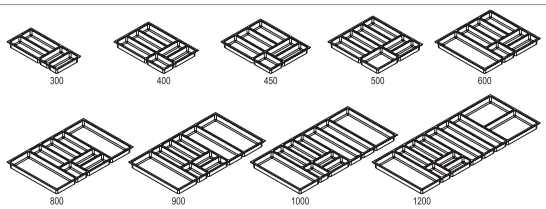

BE* -46 D
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

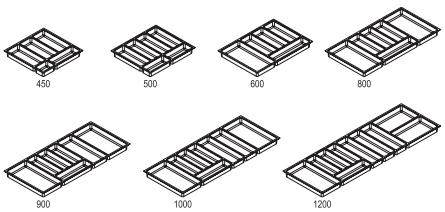







Accessories

Cutlery trays and pull-out organisers in slate grey ash wood




BE* ES
30/40/45/50/60/80/
90/100/120 cm


Slate grey ash wood cutlery tray
Solid ash wood, coated slate grey,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

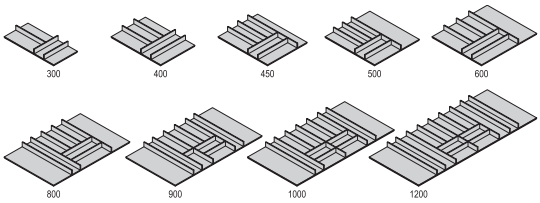

BE* -46 ES
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

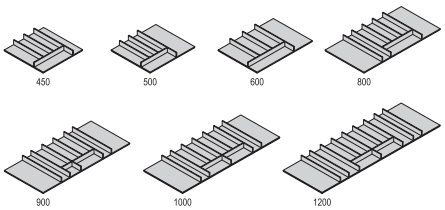



BE-M* ES
60/80/90/100/120 cm

Slate grey ash wood cutlery tray with knife block
Solid ash wood, coated slate grey,
incl. 5 knives,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

For drawers with height of 141 mm, not possible in conjunction with construction or spacer shelves KKB / DBKI*.*

Not for use in conjunction with LED interior unit light LSID.

Not possible for drawers SKU and SKA*.*



AO* ES
60/80/90/100/120 cm

Pull-out organiser, slate grey ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 8 solid wood partitions in ash for 600 mm width,
incl. 16 solid wood partitions in ash for 800/900/1000 mm width,
incl. 24 solid wood partitions in ash for 1200 mm width



AOS* ES
60/80/90/100/120 cm

Pull-out organiser, slate grey ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 7 solid wood partitions in ash for 600 mm width,
incl. 10 solid wood partitions in ash for 800/900/1000 mm width,
incl. 13 solid wood partitions in ash for 1200 mm width






Accessories

Oak cutlery trays and pull-out organisers




BE* E
30/40/45/50/60/80/90/
100/120 cm

Oak wooden cutlery tray
Solid wood design in oak,
height: 49 mm, fits drawer depth of 500 mm,
side depth: 561 mm

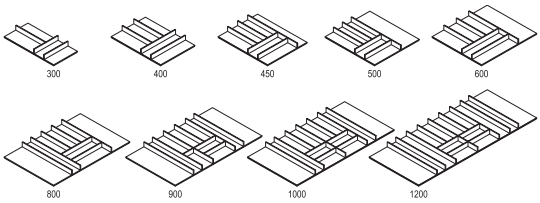

BE* -46 E
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

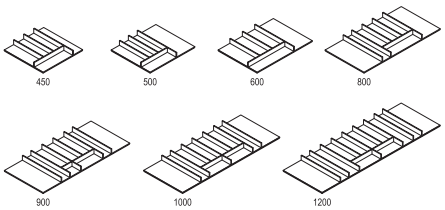



BE-M* E
60/80/90/100/120 cm

Oak wooden cutlery tray with knife block
Solid oak wood design,
incl. 5 knives,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

For drawers with height of 141 mm, not possible in conjunction with construction or spacer shelves KKB / DBKI*.*

Not for use in conjunction with LED interior unit light LSID.



AO* E
60/80/90/100/120 cm

Pull-out organiser, oak
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 8 solid wood partitions in oak for 600 mm width,
incl. 16 solid wood partitions in oak for 800/900/1000 mm width,
incl. 24 solid wood partitions in oak for 1200 mm width



AOS* E
60/80/90/100/120 cm

Pull-out organiser made of oak
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 7 solid wood partitions in oak for 600 mm width,
incl. 10 solid wood partitions in oak for 800/900/1000 mm width,
incl. 13 solid wood partitions in oak for 1200 mm width





Accessories

Mounting sets



MONSET 1


Mounting set 1
consisting of:
- 1 ball siphon 1 ½" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut



MONSET 2

Mounting set 2
consisting of:
- 1 ball siphon 1 ½" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut
- 1 hose clip, 16 - 25 mm
- 1 table socket, triple, sockets - model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



FB*
40/45/50/60/80/90/100/120 cm

Moisture protection sheet
aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs, fits only for a side depth of 561 mm


FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)
FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)



WSMS*
40/45/50/60/80/90/100/120 cm

Waterproof mat
plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUL.



WSMP*
60/80 cm

Waterproof mat Pro for sink units
Slate grey plastic, for preventing water damage in sink units not suitable for front pull-outs, only suitable for 561 mm side depth

Upstands



WAP
200/400/500 cm

Length 2000 mm
Length 4000 mm
Special length 5000 mm

Plastic upstand
Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, **delivered as strand material.**

Available in all worktop décors,
also available in:
No. 014 Stainless steel appearance



WAP-Z

WAP accessory bag
matches the plastic upstands WAPN
consisting of:
4 x interior corner 90°
2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps




WAPN
200/400/500 cm

Length 2000 mm
Length 4000 mm
Special length 5000 mm

Upstands for continuous planning with niche cladding
2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep **delivered as strand material.**

Available in:
014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.



WAPN-Z

WAP accessory bag
matches the plastic upstands WAPN
consisting of:
4 x interior corner 90° / 2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps for WAPN
2 x set of end caps for niche cladding

Available in:
014 Stainless steel appearance, 010 Black

Waste collecting systems
(fitted on bottom shelf behind hinged door)



Built-in waste collector „Solo“
plastic, slate grey, with full pull-out, capacity: 20 litres,
Built-in dimensions: h x w x d = 396 x 245 x 427 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS9430



Built-in waste collector „Tandem 8/8/8“
sorting in 3 bins:
volume: 3 x 8 l,
h x w x d = 401 x 263 x 437 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10488



Built-in waste collector Tandem 13/13
sorting in 2 bins:
volume: 2 x 13 l,
h x w x d = 401 x 263 x 437 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10494




Built-in waste collector „space saving Tandem“
Sorting in 3 bins:
Capacity: 1 x 18 l, 2 x 8.5 l,
1 additional lid for organic waste,
H x W x D = 320 x 336 x 475 mm
To be fitted on site onto bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10484



Built-in waste collector „space saving Tandem S 12/8/8“
sorting in 3 bins:
volume: 1 x 12 l, 2 x 8 l,
1 additional bio lid,
h x w x d = 347 x 434 x 330 mm

Can be built-in upwards of 500 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10485



Built-in waste collector „space saving Tandem 18/18“
sorting in 2 bins:
volume: 2 x 18 l,
h x w x d = 336 x 346 x 475 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10487

Waste collecting systems (pull-outs, fitted to the front)



Built-in waste collector „Syncro“
Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey.
h x d: 424 x 400 mm
Contents: 2 x 18 litres

Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!

AS3550

AS3551 — **as above,** however, with the following contents:
1 x 18 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!

AS3552 — **as above,** however, with the following contents:
2 x 28 l

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

AS3553 — **as above,** however, with the following contents:
1 x 28 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!



Built-in waste collector „X-Line“ X45 M35 Basic
35-litre large container with cover frame with flexible bin liner clamping system, suitable for 35-litre waste bags,
Basic drawer as partial pull-out,
h x w x d: 393 x 418 x 368 mm

Matching sink units: SPUA(D)-BW45/SPUA(D)K-BW45(-X) and NSPUA(K)-BW45(-X)!

AS9426

AS9428 — **Built-in waste collector “X-Line” X50 M35 Basic**
as above, but
h x w x d: 393 x 468 x 368 mm

Matching sink units: SPUA(D)-BW50/SPUA(D)K-BW50(-X) and NSPUA(K)-BW50(-X)!



Built-in waste collector “X-Line” X60 M7 Basic
as above, but with additional 15 litre container with lid,
h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9429



Built-in waste collector “X-Line” X60 M5 Basic
as above, but with additional base tray that can be placed on the left or right
8- and 5-litre container with lid,
h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9433

Waste collecting systems (fitted to hinged door)



AS3476

Built-in waste collector „Mono“
made of metal with removable plastic waste bins,
lid and rims are black plastic, right-hand side or left-hand side mounting,
no load on door hinges, 15 l capacity.
Lid automatically lifts upon opening door. Dimensions: h x w x d = 365 x 290 x 304 mm
Please note: Only mount waste collector on side wall with door hinge or on centre stile with corner sink units.

Can be built-in upwards of 400 mm door width.



AS10497

Built-in waste collector „Single“
plastic, slate grey,
right or left-hand installation, no strain on door hinges, 17 l capacity.
Lid lifts automatically when door is opened.
Built-in dimensions: h x w x d = 386 x 331 x 294 mm

Waste collector can only be installed on the side wall with the door hinge.

Can be built-in upwards of 450 mm door width.



AS9450


Built-in waste collector „Euro Flexx“
35 l large container with cover frame and bin liner clamping system,
fits 1 x 35 l or 2 x 17 l,
lid with indentation
can be mounted on the right or left
h x w x d = 499 x 370 x 356 mm

Can be built-in upwards of 450 mm door width.


Dimensional drawings | Height grid

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


Height grid, carcase heights

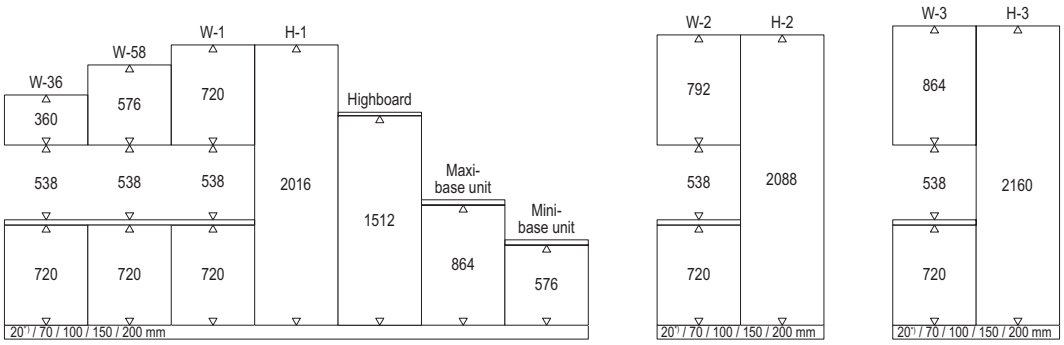


Height grid, XL carcase heights

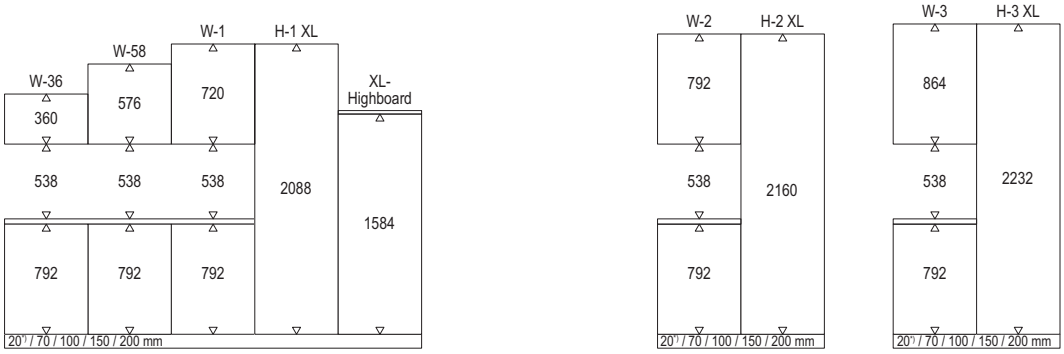

Height grid, standard and maxi door dimensions

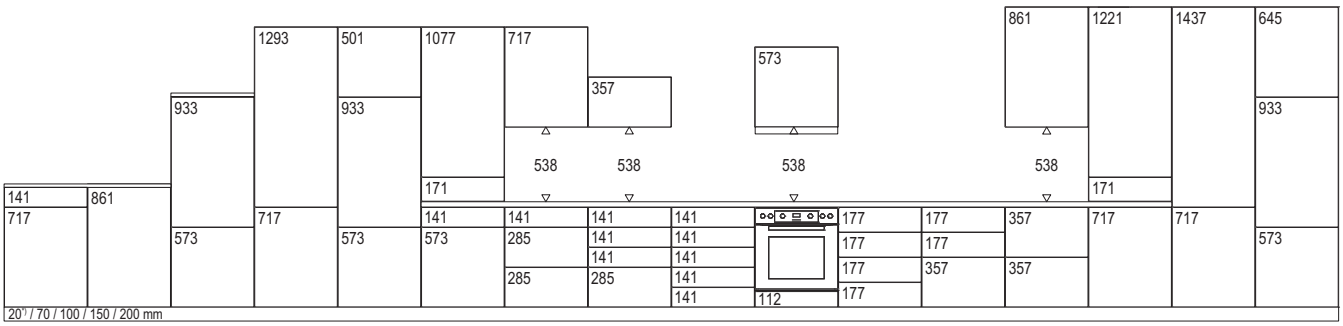


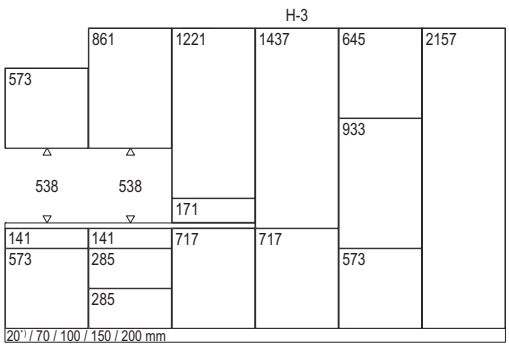


Dimensional drawings | Height grid

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


Height grid, XL door dimensions, Height 1

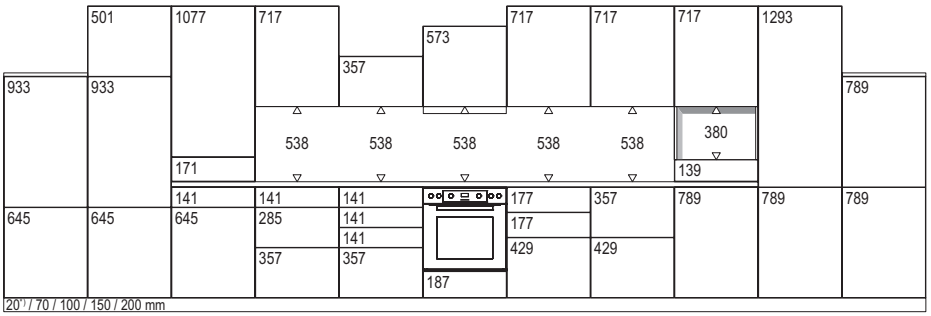


Height grid, XL door dimensions, Height 2

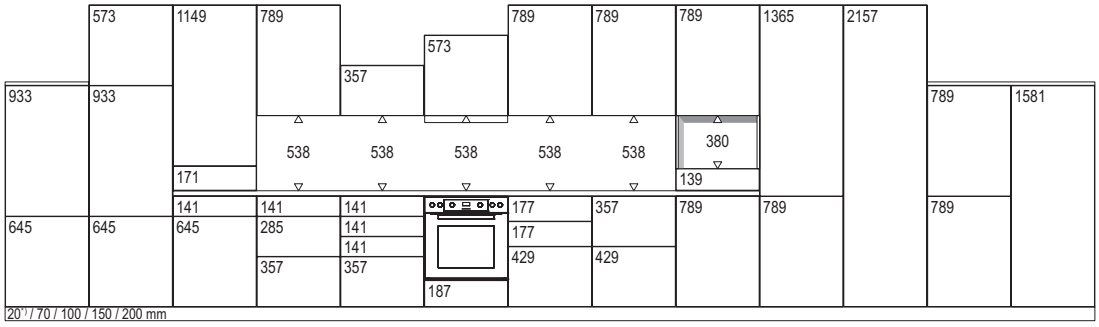

Height grid, XL door dimensions, Height 3

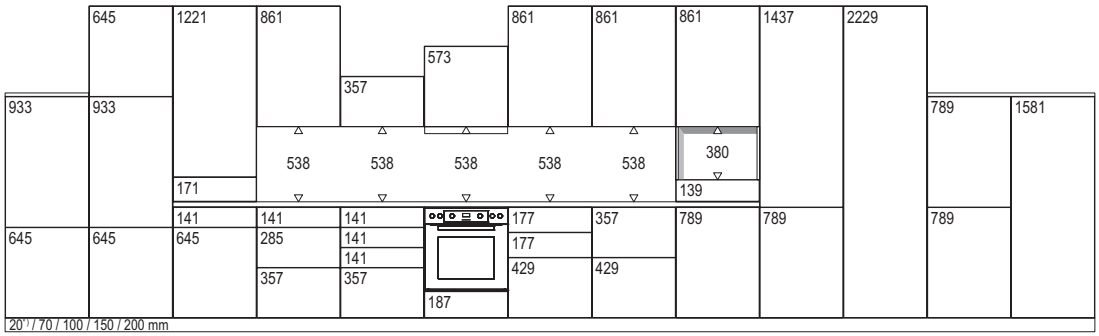

Height grid, tall units

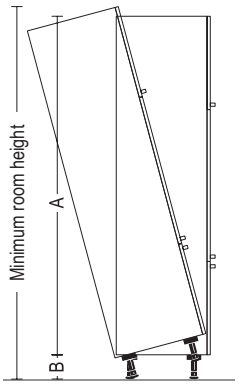

Minimum room heights

A* \ B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height
B* = Plinth height

Vista Profesyonel
Dap Vadisi, Z Ofis
Merkez Mah., Seçkin Sk.
No: 2-4A, İç Kapı No: 58
Kağıthane / İstanbul, Türkiye
+90 542 448 47 82
info@vistaprofesyonel.com
www.vistaprofesyonel.com